

# T10

## SS9184SC/SC HC



### PRODUCT INTRODUCTION

T10 is a high-power professional LED profile moving ahead with 5°-50° Electronic zoom system. It is a kind of final version stage light, accurate and efficient motor can provide not only large pan angle and tilt angles but also with smooth and high speed. PLUTO 800 PROFILE has image-cutting system can cut out any polygon, and with zoom, focus, prism, color wheel, CMY, gobo wheels, iris, frost can supply high-quality beam colors and gobos. PLUTO 800 PROFILE is equipped with animation wheel which can create dynamic water and dynamic fire effect. PLUTO 800 PROFILE is design for the cultural center, function hall, banquet hall, and rental performance market.

### PRODUCT PARAMETERS

#### Optical system

Light source	1000Wmodule
Angle	5°-50°
CRI	72
Total lumen output	23540lm
Illuminance	115040lx@5m

#### Control System

Pan/Tilt rotation	540°/270°(8-16bit)
Dimmer	0-100%16Bit
Cooling	Forced Convection
Control	DMX512、RDM、SACN、ARTNET、W-DMX (optional)

#### Effect synthetic system

Rotating Gobo	7 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation
Static Gobo	10 Gobos+White, Gobo-flow effect, Gobo shake
Colors	One color wheel (7 dichroic-filters+White, Rainbow-flow effect)
CMYK	CMY wheel, Linear CTO function
Animation Wheel	Bi-directional rotation

#### Certification

CE, MET

#### Appearance

Size	483x283x746mm
Weight	35.5kg
Casing	Flame-retardant plastic (V0)
Color	Black

#### Electrical Specs

Voltage	100-240VAC,50/60Hz
Max. Power	1200W
Power Connection	power in
Signal socket	3pin + 5pin in / out, RJ45 in / out


Display	On board Control, Custom Mode,0-25Hz Strobe
Con Personality	BASIC、STANDARD、EXTEND
Special	Pan/Tilt movement blackout, User-selectable pan/tilt ranges

Prism	One piece of 5 F prisms,bidirectional rotating, speed can be adjusted
Framing system	4 shutter blade; Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±90°.
Iris	5-100% linearly adjustable with macro
Focus	Motorized linear focus
Zoom	Motorized linear Zoom
Frost	1 Frost filter

#### Work Environment

Ambient Temp	0°C-45°C
IP Rated	IP20

### ILLUMINANCE AT DISTANCE

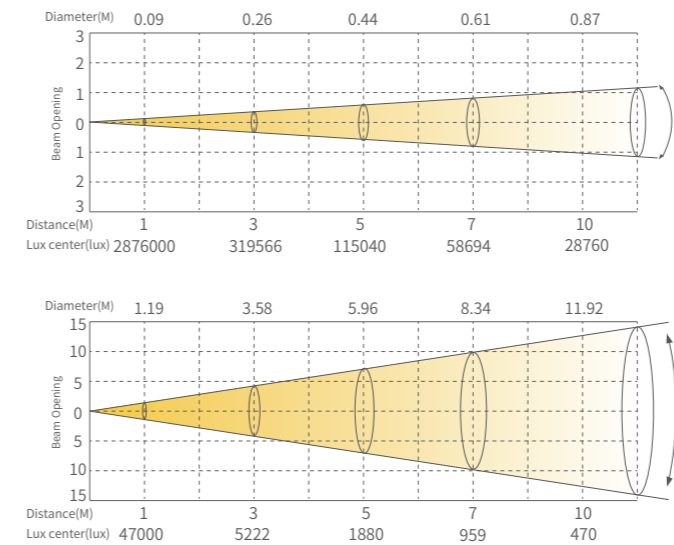

### FIXED GOBO



### Rotation Gobo



### Framing System



### Colors




### CMY+CTO




### Animation Wheel



### DIMENSIONS

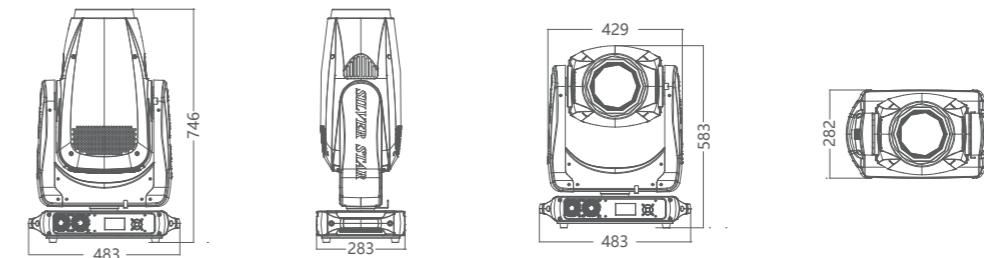

### ACCESSORIES (Accessories not included unless otherwise stated)



Flight Case (1320400243) Wireless receiver Kit (2440040465)