T8

PLUTO 800 PROFILE

SS9185SC HC

PRODUCT INTRODUCTION

The T8 is a high-power LED moving profile with an efficient optical system combined with an intelligent electronic zoom of 5°-50°. With X/Y positioning smooth and accurate, professional color wheel show magic color effect, gobo wheel switch fast and sensitive, the effect is more colorful. Professional framing systems can cut out any polygon. Professional atomizing mirrors can meet the needs of stage dyeing. The customized aperture will show the flexibility of the spot more vividly. This product is specially developed for theater, cultural hall, multi-function hall, banquet hall and rental performance venue.



PRODUCT PARAMETERS

Light source 600W

Optical system	Appearance
----------------	------------

Angle	5°-50°	Weight	35.5kg
RA	95	Casing	Flame-retardant
illumination	58000Lx@5M		engineering plastic housing

483x283x746mm

Control System

Pan/Tilt rotation 540°/270°(8-16bit)

Opera dimming effect (0-100% 16Bit dimming)

forced air cooling Cooling

DMX512、RDM、SACN、ARTNET、W-DMX (optional) Control

Effect synthetic system

Rotating Gobo 7 rotating gobos+open, gobo-flow effect,

gobo shaking effect, Bi-direction rotation

10 gobo+open, gobo flow effect, Static Gobo pattern shaking effect

7 colors+open,rainbow-flow effect Colors

CMYK CMY, CTO

Framing system $\hspace{1.5cm}$ 4 shutters, smooth cutting, each cutting direction and Angle can be independently controlled;The single shutters can be completely closed, and the entire cutting module can be rotated $\pm90^\circ$

Certification

CE

Electrical Specs

100-240VAC,50/60Hz Voltage

Max Power 890W Power Connection power in

3pin or 5pin in and out, Signal socker

RJ45 in and out

Display board control static, custom mode, 0-25Hz stroboscopic Display Special function Horizontal and vertical can be set to close in operation,

and horizontal and vertical reversal can be set

BASIC, STANDARD, EXTEND tunnel mode

One 5-facet prism, reversible rotation, adjustable speed nrism Bi-directional rotation, Speed adjustfable Animation Wheel

5-100% linear aperture adjustment with macro function Iris


With linear focus function focus With linear zoom function 700m

Frost A frost

Work Environment

0°C-45°C Ambient Temp IP Rated IP20

ILLUMINANCE AT DISTANCE

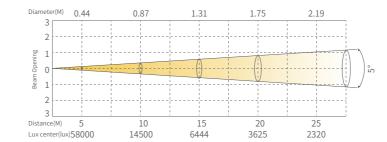

FIXED GOBO



























Framing System









Animation Wheel

CMY+CTO





Colors

DIMENSIONS









ACCESSORIES (Accessories not included unless otherwise stated)

