

NH5

NEPTUNE 550 HYBRID


SS9472SCM



PRODUCT INTRODUCTION

NEPTUNE 550 HYBRID is a powerful IP hybrid moving head, with high-efficient optics, wide zoom angle from 2.7°-33°, provides a strong Beam and Spot effect. It has fast and silent X/Y movement, professional high quality color wheel, extremely clean static and rotation gobo projection, Perfect product for outdoor concerts/events, commercial complex, theme park, amusement park and rental touring market.

ILLUMINANCE AT DISTANCE

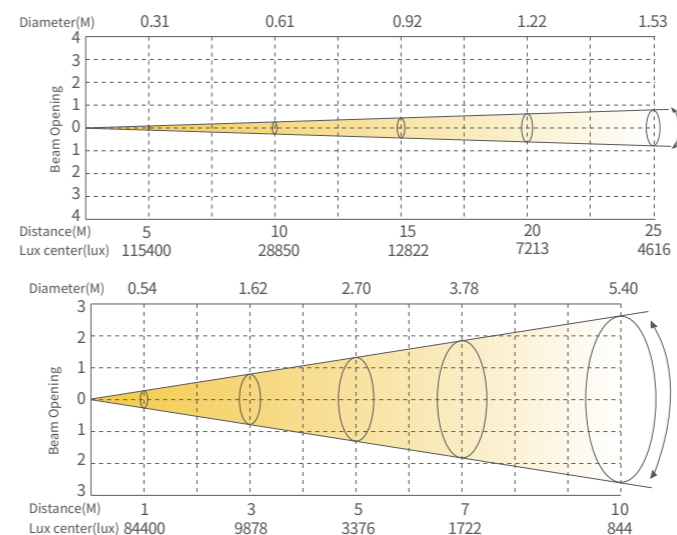

FIXED GOBO



ROTATION GOBO



COLORS



CMY



ANIMATION WHEEL



Product parameters

Optical system

Light source 450W module
Angle 2.7°-33°

Appearance

Size 416x356x670mm
Weight 34.1KG
Casing Flame-retardant plastic (V0)
Die-cast aluminum
Color Black

Electrical Specs

Voltage AC100-240V,50/60Hz
Max. Power 560W
Power Connection power in
Signal Socket 3pin or 5pin in and out, RJ45 in and out

Control System

Pan/Tilt rotation 540°/270° (8-16bit)
Dimmer 0-100% 16Bit
Cooling Forced Convection
Control DMX, RDM, ARTNET, SACN, WEB server, W-DMX (optional)

Display On board Control, Custom Mode, 0-25Hz Strobe
Con Personality STANDARD (26CH) /BASIC (22CH) /EXTEND (30CH)
Special Pan/Tilt movement blackout, User-selectable pan/tilt ranges, gravitation sensor for auto screen positioning

Effect synthetic system

Rotating Gobo 7 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation
Static Gobo 7 Gobos+ White, Gobo-flow effect, Gobo shake
Animation Wheel Bi-directional rotation, Speed adjustable
Colors CMY, One color wheel (7 dichroic-filters+White, Rainbow-flow effect)

Prism One piece of 5 F prism with bi-directional rotation, Speed adjustable
Focus Motorized linear focus
Frost 1 Frost filter


Certification

CE, MET


Work Environment

Ambient Temp -20°C-45°C
IP Rated IP66

DIMENSIONS

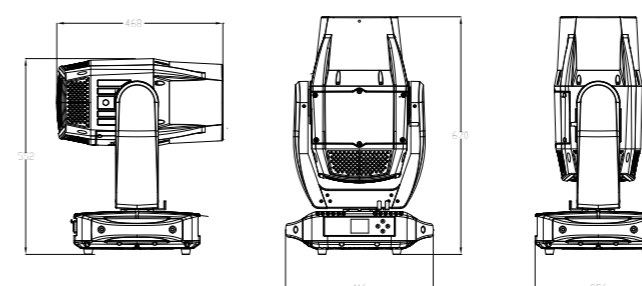

ACCESSORIES (Accessories not included unless otherwise stated)



Wireless receiver Kit (2440010465)